Solution Problem 2

a) The potential energy gain eV is converted into kinetic energy. Thus

$$\tfrac{1}{2}mv^2 = eV \qquad \text{(non-relativistically)}$$

$$\frac{mc^2}{\sqrt{1 - v^2/c^2}} - mc^2 = eV \qquad \text{(relativistically)}.$$

Hence

$$v = \begin{cases} \sqrt{2eV/m} & \text{(non - relativistically)} \\ c\sqrt{1 - (\dfrac{mc^2}{mc^2 + eV})^2} & \text{(relativistically).} \end{cases} \tag{1}$$


b) When $V = 0$ the electron moves in a homogeneous static magnetic field. The magnetic Lorentz force acts orthogonal to the velocity and the electron will move in a circle. The initial velocity is tangential to the circle.

The radius R of the orbit (the "cyclotron radius") is determined by equating the centripetal force and the Lorentz force:

$$eBv_0 = \frac{mv_0^2}{R} \ ,$$

i.e.

$$B = \frac{mv_0}{eR} \ . \tag{2}$$

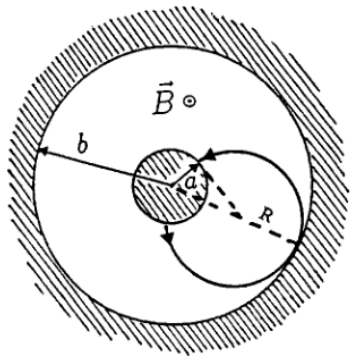

From the figure we see that in the critical case the radius R of the circle satisfies

$$\sqrt{a^2 + R^2} \ = b - R$$

By squaring we obtain

$$a^2 + R^2 = b^2 - 2bR + R^2,$$

i.e.

$$R = (b^2 - a^2)/2b \cdot$$

Insertion of this value for the radius into the expression (2) gives the critical field

$$B_c = \frac{mv_0}{eR} = \underline{\underline{\frac{2bmv_0}{(b^2 - a^2)e}}}.$$

c) The change in angular momentum with time is produced by a torque. Here the azimuthal component F_ϕ of the Lorentz force $\vec{F} = (-e)\,\vec{B} \times \vec{v}$ provides a torque $F_\phi\, r$. It is only the radial component $v_r = dr/dt$ of the velocity that provides an azimuthal Lorentz force. Hence

$$\underline{\underline{\frac{dL}{dt} = eBr\frac{dr}{dt}}},$$

which can be rewritten as

$$\frac{d}{dt}(L - \frac{eBr^2}{2}) = 0.$$

Hence

$$C = \underline{\underline{L - \tfrac{1}{2}eBr^2}} \tag{3}$$

is constant during the motion. The dimensionless number k in the problem text is thus $k = \underline{1/2}$.

d) We evaluate the constant C, equation (3), at the surface of the inner cylinder and at the maximal distance r_{m} :

$$0 - \tfrac{1}{2}eBa^2 = mvr_m - \tfrac{1}{2}eBr_m^2$$

which gives

$$v = \underline{\frac{eB(r_m^2 - a^2)}{2mr_m}}. \tag{4}$$

Alternative solution: One may first determine the electric potential *V(r)* as function of the radial distance. In cylindrical geometry the field falls off inversely proportional to r, which requires a logarithmic potential, $V(s) = c_1 \ln r + c_2$. When the two constants are determined to yield $V(a) = 0$ and $V(b) = V$ we have

$$V(r) = V\frac{\ln(r/a)}{\ln(b/a)}.$$

The gain in potential energy, $sV(r_m)$, is converted into kinetic energy:

$$\frac{1}{2}mv^2 = eV\frac{\ln(r_m/a)}{\ln(b/a)}.$$

Thus

$$v = \sqrt{\frac{2eV}{m}\frac{\ln(r_m/a)}{\ln(b/a)}}. \tag{5}$$

(4) and (5) seem to be different answers. This is only apparent since r_m is not an independent parameter, but determined by B and V so that the two answers are identical.

e) For the critical magnetic field the maximal distance r_m equals b, the radius of the outer cylinder, and the speed at the turning point is then

$$v = \frac{eB(b^2 - a^2)}{2mb}.$$

Since the Lorentz force does no work, the corresponding kinetic energy $\frac{1}{2}mv^2$ equals eV (question a):

$$v = .\sqrt{2eV/m}$$

The last two equations are consistent when

$$\frac{eB(b^2 - a^2)}{2mb} = \sqrt{2eV/m}.$$

The critical magnetic field for current cut-off is therefore

$$B_c = \underline{\underline{\frac{2b}{b^2 - a^2}\sqrt{\frac{2mV}{e}}}}.$$

f) The Lorentz force has no component parallel to the magnetic field, and consequently the velocity component v_B is constant under the motion. The corresponding displacement parallel to the cylinder axis has no relevance for the question of reaching the anode.

Let v denote the final azimuthal speed of an electron that barely reaches the anode. Conservation of energy implies that

$$\tfrac{1}{2}m(v_B^2 + v_\phi^2 + v_r^2) + eV = \tfrac{1}{2}m(v_B^2 + v^2),$$

giving

$$v = \sqrt{v_r^2 + v_\phi^2 + 2eV/m}. \tag{6}$$

Evaluating the constant C in (3) at both cylinder surfaces for the critical situation we have

$$mv_\phi a - \tfrac{1}{2}eB_c a^2 = mvb - \tfrac{1}{2}eB_c b^2.$$

Insertion of the value (6) for the velocity v yields the critical field

$$B_c = \frac{2m(vb - v_\phi a)}{e(b^2 - a^2)} = \frac{2mb}{e(b^2 - a^2)}\Big[\sqrt{v_r^2 + v_\phi^2 + 2eV/m} - v_\phi a/b\Big].$$