Solution to Theoretical Question 1

A Swing with a Falling Weight

Part A

(a) Since the length of the string $L = s + R\theta$ is constant, its rate of change must be zero. Hence we have

$$\dot{s} + R\dot{\theta} = 0 \tag{A1}$$

(b) Relative to O, Q moves on a circle of radius R with angular velocity $\dot{\theta}$, so

$$\vec{v}_Q = R\dot{\theta}\,\hat{t} = -\dot{s}\,\hat{t} \tag{A2}$$

(c) Refer to Fig. A1. Relative to Q, the displacement of P in a time interval Δt is $\Delta\vec{r}\,' = (s\Delta\theta)(-\hat{r}) + (\Delta s)\hat{t} = [(s\dot{\theta})(-\hat{r}) + \dot{s}\hat{t}]\Delta t$. It follows

$$\vec{v}\,' = -s\dot{\theta}\,\hat{r} + \dot{s}\,\hat{t} \tag{A3}$$




Figure A1

(d) The velocity of the particle relative to O is the sum of the two relative velocities given in Eqs. (A2) and (A3) so that

$$\vec{v} = \vec{v}\,' + \vec{v}_Q = (-s\dot{\theta}\,\hat{r} + \dot{s}\,\hat{t}) + R\dot{\theta}\,\hat{t} = -s\dot{\theta}\,\hat{r} \tag{A4}$$

(e) Refer to Fig. A2. The $(-\hat{t})$-component of the velocity change $\Delta\vec{v}$ is given by $(-\hat{t})\cdot\Delta\vec{v} = v\Delta\theta = v\dot{\theta}\,\Delta t$. Therefore, the $\hat{t}$-component of the acceleration $\vec{a} = \Delta\vec{v}/\Delta t$ is given by $\hat{t}\cdot\hat{a} = -v\dot{\theta}$. Since the speed v of the particle is $s\dot{\theta}$ according to Eq. (A4), we see that the $\hat{t}$-component of the particle's acceleration at P is given by

$$\vec{a}\cdot\hat{t} = -v\dot{\theta} = -(s\dot{\theta})\dot{\theta} = -s\dot{\theta}^2 \tag{A5}$$

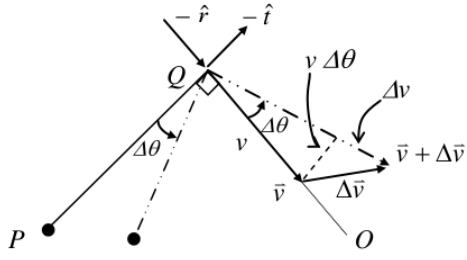


Figure A2

Note that, from Fig. A2, the radial component of the acceleration may also be obtained as

$$\vec{a}\cdot\hat{r} = -dv/dt = -d(s\dot{\theta})/dt\,.$$

(f) Refer to Fig. A3. The gravitational potential energy of the particle is given by $U = -mgh$. It may be expressed in terms of s and θ as

$$U(\theta) = -mg[R(1-\cos\theta) + s\sin\theta] \tag{A6}$$

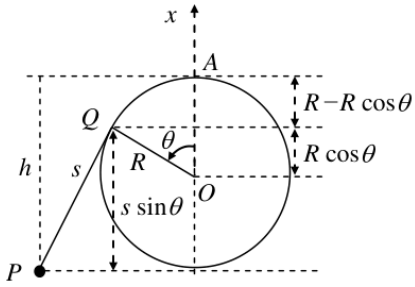


Figure A3

(g) At the lowest point of its trajectory, the particle's gravitational potential energy U must assume its minimum value U_m. By differentiating Eq. (A6) with respect to θ and using Eq. (A1), the angle θ_m corresponding to the minimum gravitational energy can be obtained.

$$\begin{aligned}\frac{dU}{d\theta} &= -mg\left(R\sin\theta + \frac{ds}{d\theta}\sin\theta + s\cos\theta\right) \\ &= -mg\left[R\sin\theta + (-R)\sin\theta + s\cos\theta\right] \\ &= -mgs\cos\theta\end{aligned}$$

At $\theta = \theta_m$, $\left.\dfrac{dU}{d\theta}\right|_{\theta_m} = 0$. We have $\theta_m = \dfrac{\pi}{2}$. The lowest point of the particle's trajectory is shown in Fig. A4 where the length of the string segment of QP is $s = L - \pi R/2$.




Figure A4

From Fig. A4 or Eq. (A6), the minimum potential energy is then

$$U_m = U(\pi/2) = -mg[R + L - (\pi R/2)] \tag{A7}$$

Initially, the total mechanical energy E is 0. Since E is conserved, the speed v_m of the particle at the lowest point of its trajectory must satisfy

$$E = 0 = \frac{1}{2}mv_m^2 + U_m \tag{A8}$$

From Eqs. (A7) and (A8), we obtain

$$v_m = \sqrt{-2U_m/m} = \sqrt{2g[R + (L - \pi R/2)]} \tag{A9}$$

Part B

(h) From Eq. (A6), the total mechanical energy of the particle may be written as

$$E = 0 = \frac{1}{2}mv^2 + U(\theta) = \frac{1}{2}mv^2 - mg[R(1 - \cos\theta) + s\sin\theta] \tag{B1}$$

From Eq. (A4), the speed v is equal to $s\dot{\theta}$. Therefore, Eq. (B1) implies

$$v^2 = (s\dot{\theta})^2 = 2g[R(1 - \cos\theta) + s\sin\theta] \tag{B2}$$

Let T be the tension in the string. Then, as Fig. B1 shows, the $\hat{t}$-component of the net force on the particle is $-T + mg\sin\theta$. From Eq. (A5), the tangential acceleration of the particle is $(-s\dot{\theta}^2)$. Thus, by Newton's second law, we have

$$m(-s\dot{\theta}^2) = -T + mg\sin\theta \tag{B3}$$

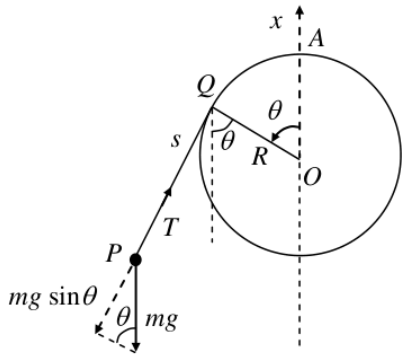



Figure B1

According to the last two equations, the tension may be expressed as

$$\begin{aligned} T &= m\left(s\dot{\theta}^2 + g\sin\theta\right) = \frac{mg}{s}\left[2R(1-\cos\theta) + 3s\sin\theta\right] \\ &= \frac{2mgR}{s}\left[\tan\frac{\theta}{2} - \frac{3}{2}\left(\theta - \frac{L}{R}\right)\right](\sin\theta) \\ &= \frac{2mgR}{s}(y_1 - y_2)(\sin\theta) \end{aligned} \tag{B4}$$

The functions $y_1 = \tan(\theta/2)$ and $y_2 = 3(\theta - L/R)/2$ are plotted in Fig B2.

Figure B2

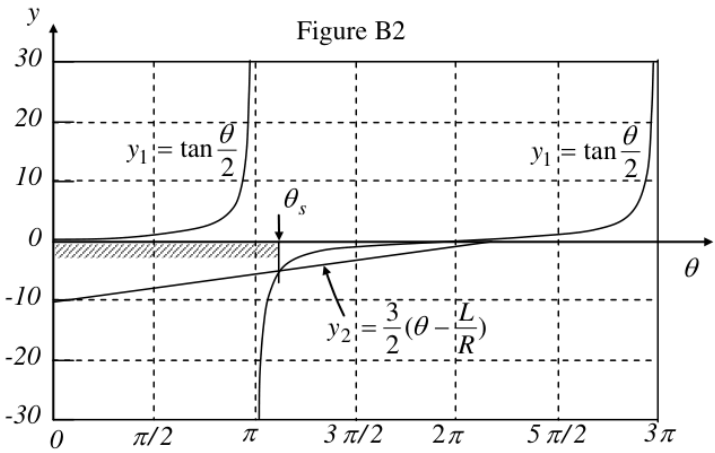

From Eq. (B4) and Fig. B2, we obtain the result shown in Table B1. The angle at which $.y_2 = y_1$ is called θ_s $(\pi < \theta_s < 2\pi)$ and is given by

$$\frac{3}{2}\left(\theta_s - \frac{L}{R}\right) = \tan\frac{\theta_s}{2} \tag{B5}$$

or, equivalently, by

$$\frac{L}{R} = \theta_s - \frac{2}{3}\tan\frac{\theta_s}{2} \tag{B6}$$

Since the ratio L/R is known to be given by

$$\frac{L}{R} = \frac{9\pi}{8} + \frac{2}{3}\cot\frac{\pi}{16} = \left(\pi + \frac{\pi}{8}\right) - \frac{2}{3}\tan\frac{1}{2}\left(\pi + \frac{\pi}{8}\right) \tag{B7}$$

one can readily see from the last two equations that $\theta_s = 9\pi/8$.

Table B1

	$(y_1 - y_2)$	$\sin\theta$	tension T
$0 < \theta < \pi$	positive	positive	positive
$\theta = \pi$	$+\infty$	0	positive
$\pi < \theta < \theta_s$	negative	negative	positive
$\theta = \theta_s$	zero	negative	zero
$\theta_s < \theta < 2\pi$	positive	negative	negative

Table B1 shows that the tension T must be positive (or the string must be taut and straight) in the angular range $0 < \theta < \theta_s$. Once θ reaches θ_s, the tension T becomes zero and the part of the string not in contact with the rod will not be straight afterwards. The shortest possible value $s_{\min}$ for the length s of the line segment QP therefore occurs at $\theta = \theta_s$ and is given by

$$s_{\min} = L - R\theta_s = R\left(\frac{9\pi}{8} + \frac{2}{3}\cot\frac{\pi}{16} - \frac{9\pi}{8}\right) = \frac{2R}{3}\cot\frac{\pi}{16} = 3.352R \qquad \text{(B8)}$$

When $\theta = \theta_s$, we have $T = 0$ and Eqs. (B2) and (B3) then leads to $v_s^2 = -gs_{\min}\sin\theta_s$. Hence the speed v_s is

$$\begin{aligned} v_s &= \sqrt{-gs_{\min}\sin\theta_s} = \sqrt{\frac{2gR}{3}\cot\frac{\pi}{16}\sin\frac{\pi}{8}} = \sqrt{\frac{4gR}{3}}\cos\frac{\pi}{16} \\ &= 1.133\sqrt{gR} \end{aligned} \qquad \text{(B9)}$$

(i) When $\theta \geq \theta_s$, the particle moves like a projectile under gravity. As shown in Fig. B3, it is projected with an initial speed v_s from the position $P = (x_s, y_s)$ in a direction making an angle $\phi = (3\pi/2 - \theta_s)$ with the y-axis.

The speed v_H of the particle at the highest point of its parabolic trajectory is equal to the y-component of its initial velocity when projected. Thus,

$$v_H = v_s\sin(\theta_s - \pi) = \sqrt{\frac{4gR}{3}}\cos\frac{\pi}{16}\sin\frac{\pi}{8} = 0.4334\sqrt{gR} \qquad \text{(B10)}$$

The horizontal distance H traveled by the particle from point P to the point of maximum height is

$$H = \frac{v_s^2\sin 2(\theta_s - \pi)}{2g} = \frac{v_s^2}{2g}\sin\frac{9\pi}{4} = 0.4535R \qquad \text{(B11)}$$

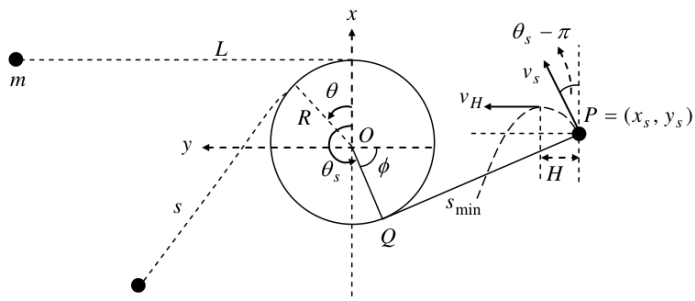


Figure B3

The coordinates of the particle when $\theta = \theta_s$ are given by

$$x_s = R\cos\theta_s - s_{\min}\sin\theta_s = -R\cos\frac{\pi}{8} + s_{\min}\sin\frac{\pi}{8} = 0.358R \qquad \text{(B12)}$$

$$y_s = R\sin\theta_s + s_{\min}\cos\theta_s = -R\sin\frac{\pi}{8} - s_{\min}\cos\frac{\pi}{8} = -3.478R \qquad \text{(B13)}$$

Evidently, we have $|y_s| > (R+H)$. Therefore the particle can indeed reach its maximum height without striking the surface of the rod.

Part C

(j) Assume the weight is initially lower than O by h as shown in Fig. C1.

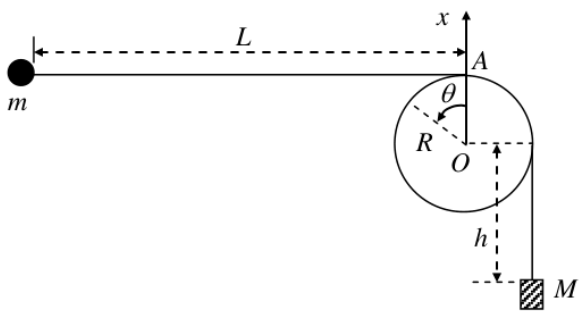


Figure C1

When the weight has fallen a distance D and stopped, the law of conservation of total mechanical energy as applied to the particle-weight pair as a system leads to

$$-Mgh = E' - Mg(h + D) \tag{C1}$$

where E' is the *total mechanical energy of the particle* when the weight has stopped. It follows

$$E' = MgD \tag{C2}$$

Let Λ be the total length of the string. Then, its value at $\theta = 0$ must be the same as at any other angular displacement θ. Thus we must have

$$\Lambda = L + \frac{\pi}{2}R + h = s + R\left(\theta + \frac{\pi}{2}\right) + (h + D) \tag{C3}$$

Noting that $D = \alpha L$ and introducing $\ell = L - D$, we may write

$$\ell = L - D = (1 - \alpha)L \tag{C4}$$

From the last two equations, we obtain

$$s = L - D - R\theta = \ell - R\theta \tag{C5}$$

After the weight has stopped, the total mechanical energy of the particle must be conserved. According to Eq. (C2), we now have, instead of Eq. (B1), the following equation:

$$E' = MgD = \frac{1}{2}mv^2 - mg[R(1 - \cos\theta) + s\sin\theta] \tag{C6}$$

The square of the particle's speed is accordingly given by

$$v^2 = (s\dot{\theta})^2 = \frac{2MgD}{m} + 2gR\left[(1 - \cos\theta) + \frac{s}{R}\sin\theta\right] \tag{C7}$$

Since Eq. (B3) stills applies, the tension T of the string is given by

$$-T + mg\sin\theta = m(-s\dot{\theta}^2) \tag{C8}$$

From the last two equations, it follows

$$\begin{aligned} T &= m\left(s\dot{\theta}^2 + g\sin\theta\right) \\ &= \frac{mg}{s}\left[\frac{2M}{m}D + 2R(1 - \cos\theta) + 3s\sin\theta\right] \\ &= \frac{2mgR}{s}\left[\frac{MD}{mR} + (1 - \cos\theta) + \frac{3}{2}\left(\frac{\ell}{R} - \theta\right)\sin\theta\right] \end{aligned} \tag{C9}$$

where Eq. (C5) has been used to obtain the last equality.

We now introduce the function

$$f(\theta) = 1 - \cos\theta + \frac{3}{2}\left(\frac{\ell}{R} - \theta\right)\sin\theta \tag{C10}$$

From the fact $\ell = (L - D) >> R$, we may write

$$f(\theta) \approx 1 + \frac{3}{2}\frac{\ell}{R}\sin\theta - \cos\theta = 1 + A\sin(\theta - \phi) \tag{C11}$$

where we have introduced

$$A = \sqrt{1 + \left(\frac{3}{2}\frac{\ell}{R}\right)^2} \quad , \quad \phi = \tan^{-1}\left(\frac{2R}{3\ell}\right) \tag{C12}$$

From Eq. (C11), the minimum value of $f(\theta)$ is seen to be given by

$$f_{\min} = 1 - A = 1 - \sqrt{1 + \left(\frac{3}{2}\frac{\ell}{R}\right)^2} \tag{C13}$$

Since the tension T remains nonnegative as the particle swings around the rod, we have from Eq. (C9) the inequality

$$\frac{MD}{mR} + f_{\min} = \frac{M(L-\ell)}{mR} + 1 - \sqrt{1 + \left(\frac{3\ell}{2R}\right)^2} \geq 0 \tag{C14}$$

or

$$\left(\frac{ML}{mR}\right) + 1 \;\geq\; \left(\frac{M\ell}{mR}\right) + \sqrt{1 + \left(\frac{3\ell}{2R}\right)^2} \approx \left(\frac{M\ell}{mR}\right) + \left(\frac{3\ell}{2R}\right) \tag{C15}$$

From Eq. (C4), Eq. (C15) may be written as

$$\left(\frac{ML}{mR}\right) + 1 \;\geq\; \left(\frac{ML}{mR} + \frac{3L}{2R}\right)(1-\alpha) \tag{C16}$$

Neglecting terms of the order (R/L) or higher, the last inequality leads to

$$\alpha \;\geq\; 1 - \frac{\left(\frac{ML}{mR}\right) + 1}{\left(\frac{ML}{mR} + \frac{3L}{2R}\right)} = \frac{\frac{3L}{2R} - 1}{\frac{ML}{mR} + \frac{3L}{2R}} = \frac{1 - \frac{2R}{3L}}{\frac{2M}{3m} + 1} \approx \frac{1}{1 + \frac{2M}{3m}} \tag{C17}$$

The critical value for the ratio D/L is therefore

$$\alpha_c = \frac{1}{1 + \frac{2M}{3m}} \tag{C18}$$

Marking Scheme

Theoretical Question 1
A Swing with a Falling Weight

Total Scores	Sub Scores	Marking Scheme for Answers to the Problem
Part A 4.3 pts.	(a) 0.5	Relation between $\dot{\theta}$ and $\dot{s}$. ($\dot{s} = -R\dot{\theta}$)
		• 0.2 for $\dot{\theta} \propto \dot{s}$.
		• 0.3 for proportionality constant ($-R$).
	(b) 0.5	Velocity of Q relative to O. ($\vec{v}_Q = R\dot{\theta}\,\hat{t}$)
		• 0.2 for magnitude $R\dot{\theta}$.
		• 0.3 for direction $\hat{t}$.
	(c) 0.7	Particle's velocity at P relative to Q. ($\vec{v}\,' = -s\dot{\theta}\,\hat{r} + \dot{s}\,\hat{t}$)
		• 0.2+0.1 for magnitude and direction of $\hat{r}$-component.
		• 0.3+0.1 for magnitude and direction of $\hat{t}$-component.
	(d) 0.7	Particle's velocity at P relative to O. ($\vec{v} = \vec{v}\,' + \vec{v}_Q = -s\dot{\theta}\,\hat{r}$)
		• 0.3 for vector addition of $\vec{v}\,'$ and $\vec{v}_Q$.
		• 0.2+0.2 for magnitude and direction of $\vec{v}$.
	(e) 0.7	$\hat{t}$-component of particle's acceleration at P.
		• 0.3 for relating $\vec{a}$ or $\vec{a} \cdot \hat{t}$ to the velocity in a way that implies $\lvert\vec{a} \cdot \hat{t}\rvert = v^2/s$.
		• 0.4 for $\vec{a} \cdot \hat{t} = -s\dot{\theta}^2$ (0.1 for minus sign.)
	(f) 0.5	Potential energy U.
		• 0.2 for formula $U = -mgh$.
		• 0.3 for $h = R(1 - \cos\theta) + s\sin\theta$ or U as a function of θ, s, and R.
	(g) 0.7	Speed at lowest point v_m.
		• 0.2 for lowest point at $\theta = \pi/2$ or U equals minimum U_m.
		• 0.2 for total mechanical energy $E = mv_m^2/2 + U_m = 0$.
		• 0.3 for $v_m = \sqrt{-2U_m/m} = \sqrt{2g[R + (L - \pi R/2)]}$.
Part B 4.3 pts.	(h) 2.4	Particle's speed v_s when $\overline{QP}$ is shortest.
		• 0.4 for tension T becomes zero when $\overline{QP}$ is shortest.
		• 0.3 for equation of motion $-T + mg\sin\theta = m(-s\dot{\theta}^2)$.
		• 0.3 for $E = 0 = m(s\dot{\theta})^2/2 - mg[R(1 - \cos\theta) + s\sin\theta]$.
		• 0.4 for $\frac{3}{2}\left(\theta_s - \frac{L}{R}\right) = \tan\frac{\theta_s}{2}$.
		• 0.5 for $\theta_s = 9\pi/8$.
		• 0.3+0.2 for $v_s = \sqrt{4gR/3}\cos\pi/16 = 1.133\sqrt{gR}$.
	(i) 1.9	The speed v_H of the particle at its highest point.
		• 0.4 for particle undergoes projectile motion when $\theta \geq \theta_s$.
		• 0.3 for angle of projection $\phi = (3\pi/2 - \theta_s)$.
		• 0.3 for v_H is the y-component of its velocity at $\theta = \theta_s$.
		• 0.4 for noting particle does not strike the surface of the rod.
		• 0.3+0.2 for $v_H = \sqrt{4gR/3}\cos(\pi/16)\sin(\pi/8) = 0.4334\sqrt{gR}$.
Part C 3.4 pts	(j) 3.4	The critical value α_c of the ratio D/L.
		• 0.4 for particle's energy $E' = MgD$ when the weight has stopped.
		• 0.3 for $s = L - D - R\theta$.
		• 0.3 for $E' = MgD = mv^2/2 - mg[R(1-\cos\theta) + s\sin\theta]$.
		• 0.3 for $-T + mg\sin\theta = m(-s\dot{\theta}^2)$.
		• 0.3 for concluding T must not be negative.
		• 0.6 for an inequality leading to the determination of the range of D/L.
		• 0.6 for solving the inequality to give the range of $\alpha = D/L$.
		• 0.6 for $\alpha_c = (1 + 2M/3m)$.